



Pictured trough sink in Corian® Ash Concrete

TROUGH SINK FEATURES

- ✓ Fabricated with Corian® Solid Surface
- ✓ Top finished all four sides
- ✓ 24" or 22-1/4" depth
- ✓ Custom widths
- ✓ ADA Compliant (when installed to guidelines)
- ✓ 1/8" Eased edge profile
- ✓ Custom drilling available for any faucet size
- ✓ Includes 1-1/4" chrome grid drain with overflow
- ✓ Single center drain up to 60", Double drain up to 96"
- ✓ Optional loose back and/or end splash
- ✓ Optional wall-mount hardware available

PORTFOLIO 71

Portfolio 71 is our innovative line of semi-custom, ready-to-install products made with 100% Premium Corian® and Corian® Quartz Surfaces. Our offering includes vanity tops, shower or tub surrounds, and shower basins, all available in a huge selection of colors. With Portfolio 71, adding beauty and luxury to any bathroom space is snap!

✉ psorder@parksite.com


☎ (800) 237-0229 ext: 1

🏠 parksite.com


READY-TO-INSTALL, SEMI-CUSTOM

TROUGH SINKS

Introducing Portfolio 71's line of semi-custom, ready-to-install trough sinks, fabricated with 100% premium Corian® Solid Surface. Elevate your installation with these beautiful hand-crafted, on-trend sinks for whatever your application.

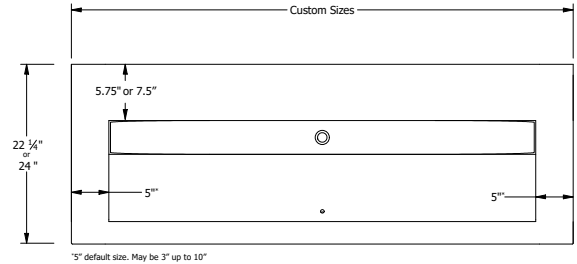


*5" default size. May be 3" up to 10"

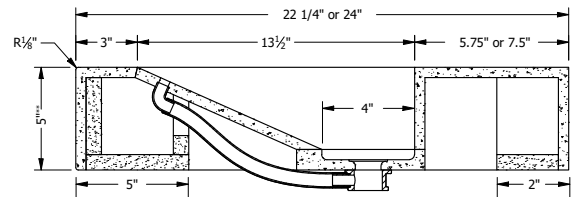

**5" Edge -Actual size 4 7/8"

ADA COMPLIANT

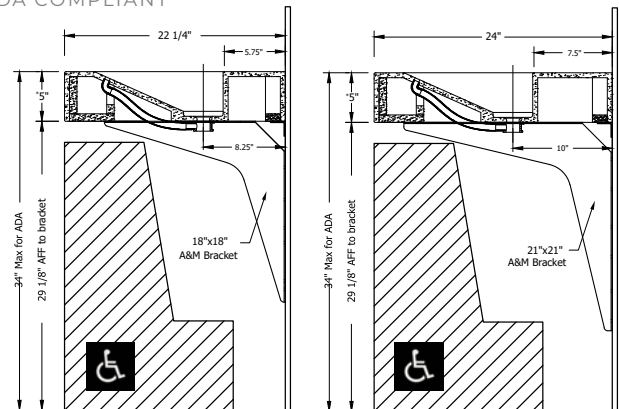

*5" Edge -Actual size 4 7/8"

*5" Edge -Actual size 4 7/8"

MADE WITH


CORIAN® SOLID SURFACE

- ✓ **NON-POROUS** - Spills do not permeate the surface
- ✓ **CLEAN** - Doesn't promote the growth of mold, mildew or bacteria
- ✓ **RENEWABLE** - Marks and scratches can be removed easily
- ✓ **DURABLE** - Acrylic material prevents cracks and chipping
- ✓ **SUPPORTED** - 10-year installed warranty backed by DuPont™

TROUGH SINKS

OPTIONAL INSTALLATION HARDWARE

- ✓ Includes A&M 21" x 21" or 18" x 18" brackets in black finish
 - ✓ (1 per 24" plus 1)
- ✓ Includes 1-½" x 1-½" mill aluminum angle wall cleat
- ✓ Wall cleat is mitered at corners and can be drilled as needed
- ✓ End wall cleats are 21" or 18" deep
- ✓ Screws and wall fasteners are not included
- ✓ Black finished screws are recommended
- ✓ Additional bracket sizes available for standoff application

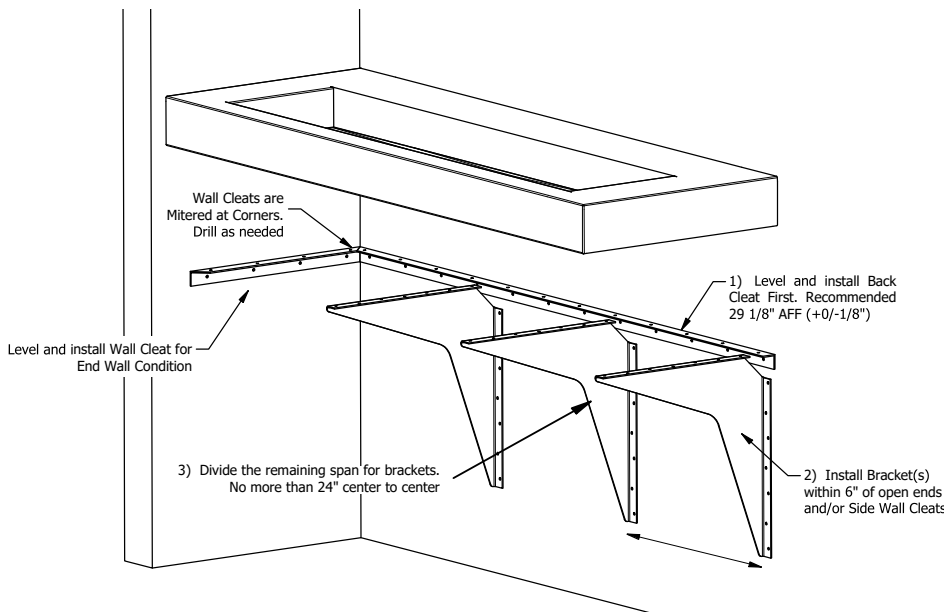

SIMPLE INSTALL

1. Install wall cleat at desired height
2. Install brackets at open end
3. Install center brackets

CHOOSE FROM THE BELOW, OR ANY OF THE 100+ CORIAN® SOLID SURFACE COLORS!



Basalt Terrazzo



Carbon Aggregate



Jade Onyx



Ash Aggregate



Limestone Prima



Gray Onyx